


# The 4850PoE & LCD

Low Current Draw means smaller or no additional power supplies required for most installations.

4800 Series

Electric Characteristics					
Item	Voltage	Amps	Watts	Duty	Sound
4850PoE	12DC	0.260	3.12	Intm./Cont.	Silent
4850LCD	24DC	0.135	3.24	Intm./Cont.	Silent
Other surface mounted strikes start at:				<b>Don't Forget Amperage Drop! Compensate with a Low Current Draw Strike.</b>	
	12DC	0.450	5.40		
	24DC	0.250	6.00		

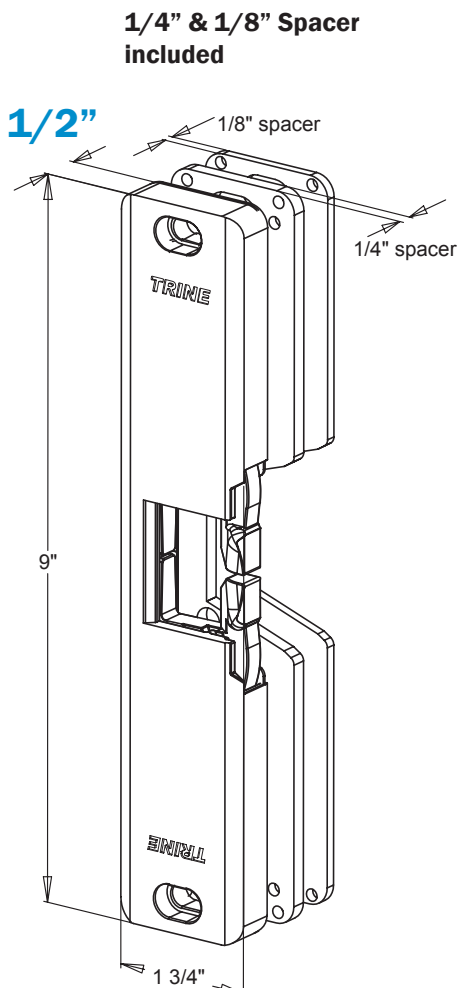

**4850PoE-32D**  
(Satin Stainless Steel – BHMA630)

The following finishes are:

- **4850PoE-US3**  
(Bright Brass – BHMA605)
- **4850PoE-US4**  
(Satin Brass – BHMA606)
- **4850PoE-US10**  
(Satin Bronze – BHMA612)
- **4850PoE-US10B**  
(Dark Bronze – BHMA640)
- **4850PoE-32**  
(Polished Stainless – BHMA629)

\*\*\* Replace PoE with LCD when ordering the 24DC model\*\*\*



Dimensions for: 4850, 4850LCD, and 4850PoE (are the same)